AS-i Substructure Module in IP67

THE AS-INTERFACE MASTERS

AS-i Substructure Module in IP67

BW2349: suitable for mounting on symmetrical DIN profile rail 35 mm or for wall-mounting

BW2350 and BW2351: fixing centres CNOMO compliant; also suitable for wall mounting

Protection category IP67

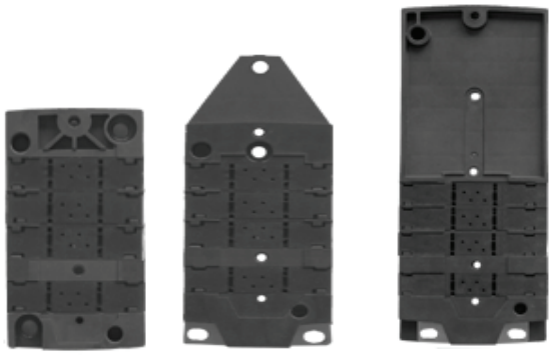

BW2349 BW2350 BW2351

Article no. BW2349 AS-i Substructure Module for 4-channel module in 45 mm-housing

Article no. BW2350 AS-i Substructure Module (CNOMO) for 4-channel module in 45 mm-housing

Article no. BW2351 AS-i Substructure Module (CNOMO) for 8-channel module in 60 mm-housing

AS-i substructure modules are a necessary accessory for AS-i modules of the product family M12 modules in IP67.

Article no.	BW2349	BW2350	BW2351
Cable	max. 2 yellow AS-i flat cables (AS-i) and 2 black AS-i flat cables (AUX) simultaneously connectable to the formation of junctions mounting is possible in two directions		
Mounting	2-point	4-point (centerline spacing CNOMO)	4-point (centerline spacing CNOMO)
Mounting on symmetrical DIN rail 35 mm	yes	no	no
Connection	cut clamp terminals (IDC method)		
Protection category	IP67		
Dimensions (L / W/ H in mm)	81 / 45 / 15	117 / 45 / 10	152 / 60 / 11
Weight	45 g	40 g	66 g

Substructure modules and appropriate modules:

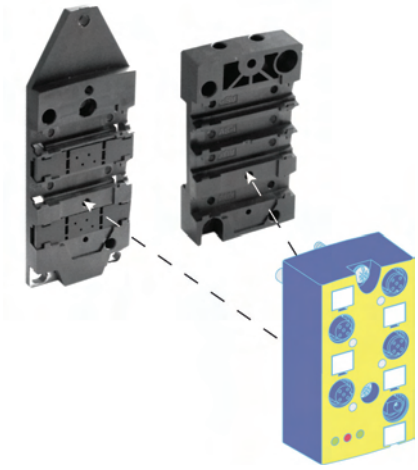

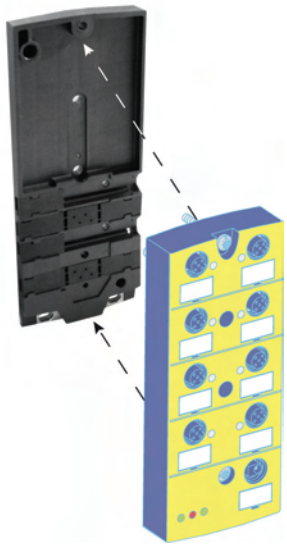

AS-i Substructure Module in IP67

THE AS-INTERFACE MASTERS

Wiring examples:

on a 4-channel module:

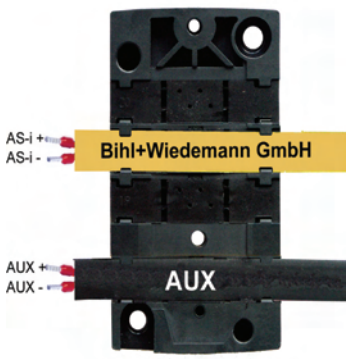

normal direction

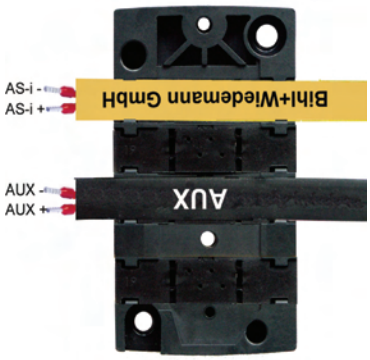

turned direction

junctions on a 8-channel module:

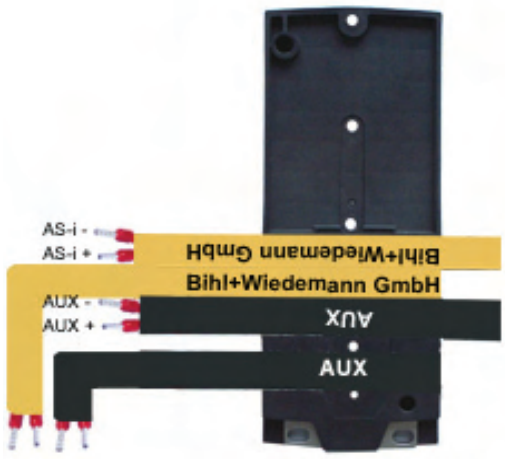

junctions

Dimensions:

4-channel module:

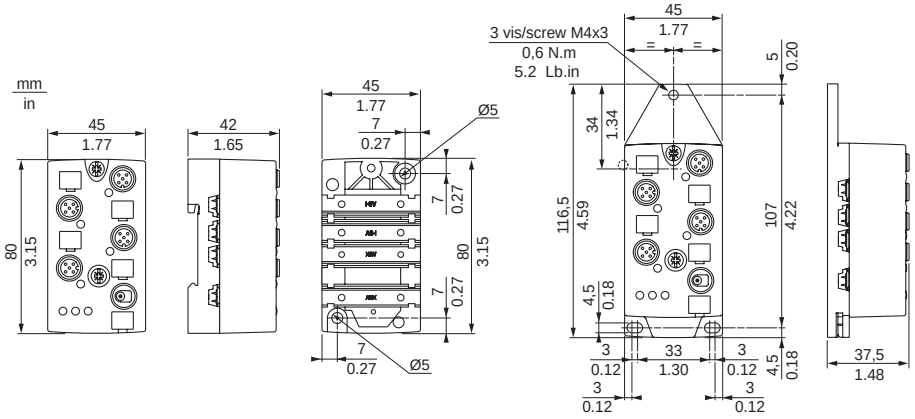
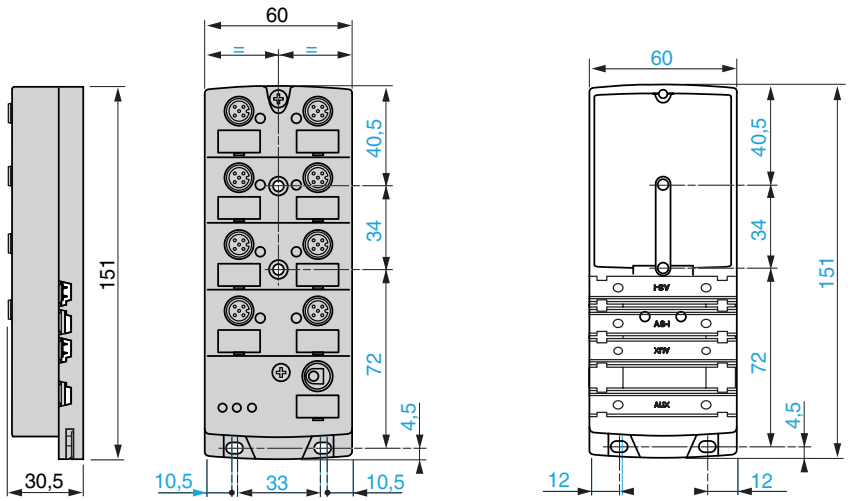
8-channel module: